


Product model: A306C



A306C Product Show

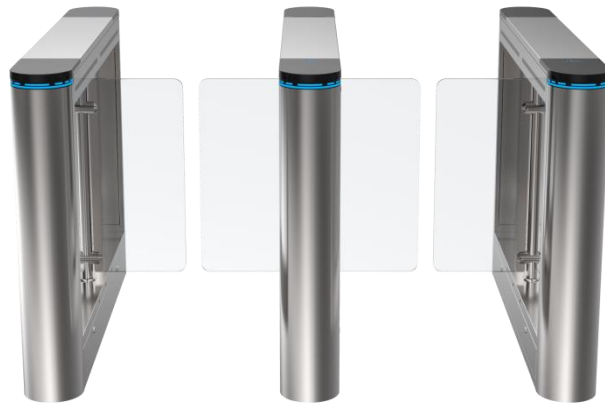

two-channel




Single channel

Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 With functions of anti-tail, anti-reverse pass and so on;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、 With infrared anti-clip function (anti-clip when gate is open or running);
- 6、 Compatible with IC, ID card, scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available, including two-way card reading and one-way card reading,etc.

Size drawing

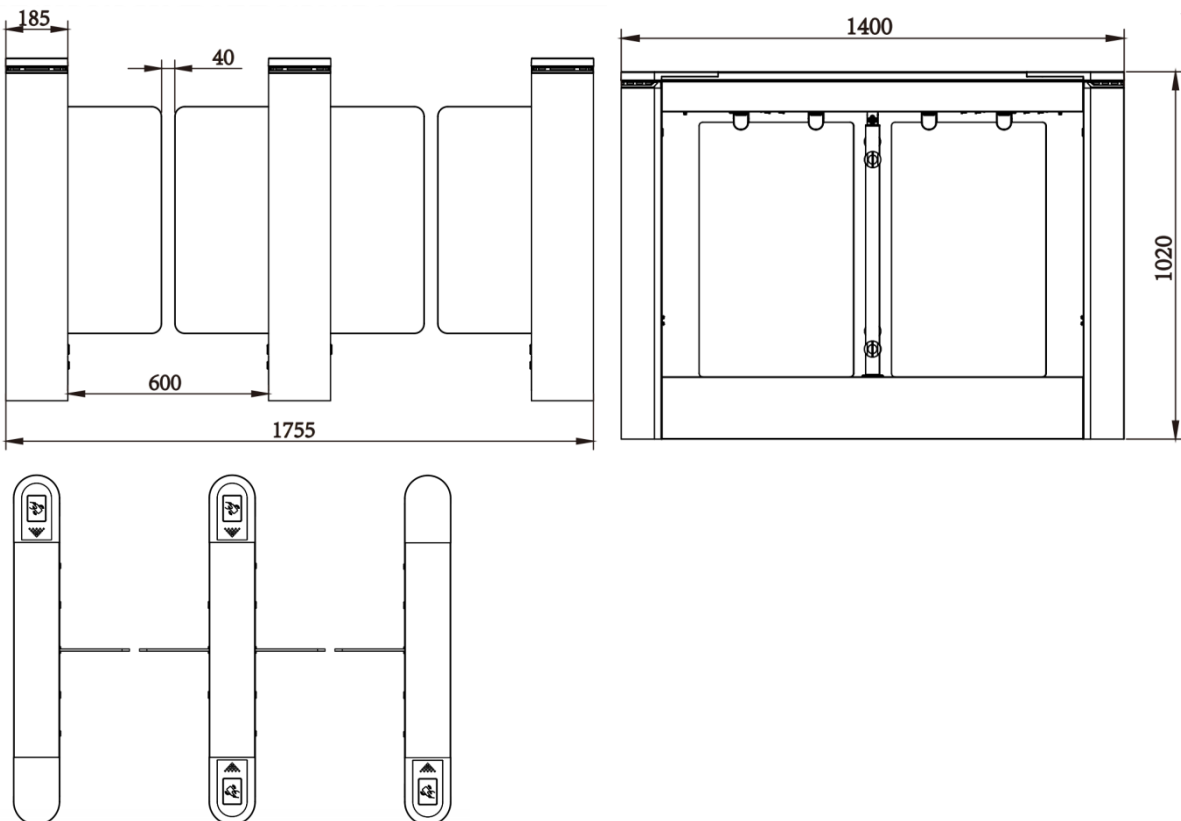

Parame-

Size (L*W*H)	1400*185*1020mm
Material	Top δ =1.5mm/ body δ =1.2mm SUS304
Filling Panel material	8mm clear Acrylic
Arm material	10mm clear Acrylic
Pass width	600-900mm
Movement	Brushless Movement of Swing Gate
Power supply	24V 150W
Input voltage	AC100V~240V,50/60HZ
Drive Unit	DC brushless motor 60K 50W
Pass rate	35-50 persons/minute
Open Speed	0.5s/1.5s
Sensor	6 pairs
Indicator Light	RGB light
Control Unit	Brushless control system
Noise	\leq 65dB
Temperature	-20°C~+70°C
Humidity	\leq 90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Product model: A306C

Case share

